

**Solution Manual for Introduction to Geotechnical Engineering 2nd Edition Das  
Sivakugan 1305257324 9781305257320**

**Link full download:**

**Solution Manual:**



<https://testbankpack.com/p/solution-manual-for-introduction-to-geotechnical-engineering-2nd-edition-das-sivakugan-1305257324-9781305257320/>

- 2.1 a. **False**  
 b. **True**  
 c. **False**  
 d. **False**  
 e. **True**

2.2 a.

U.S. sieve No.	Mass of soil retained on each sieve (g)	Percent retained on each sieve	Percent finer
4	0.0	0.0	<b>100.0</b>
10	21.6	4.8	<b>95.2</b>
20	49.5	11.0	<b>84.2</b>
40	102.6	22.8	<b>61.4</b>
60	89.1	19.8	<b>41.6</b>
100	95.6	21.2	<b>20.4</b>
200	60.4	13.4	<b>7.0</b>
Pan	31.2	7.0	
	2450		

The grain-size distribution is shown.

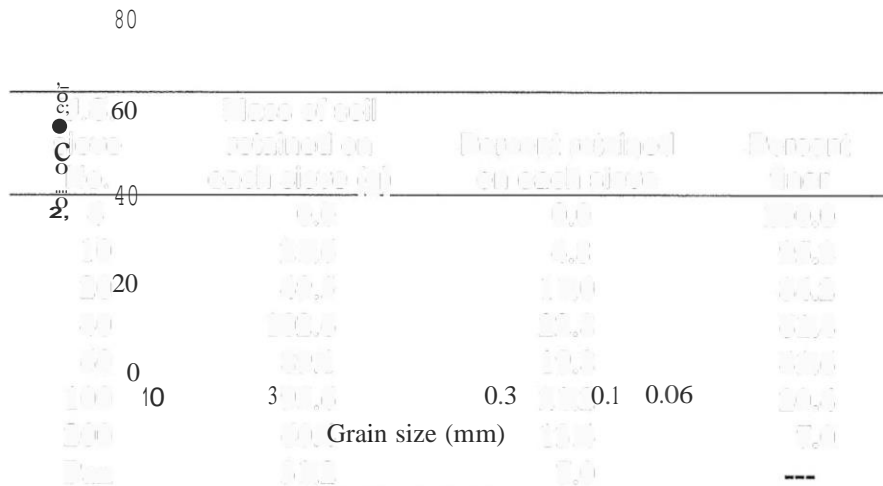

b. From the figure on Page 1,  $D_{60} = 0.41$  mm,  $D_{30} = 0.185$  mm,  $D_{10} = 0.09$  mm


c.  $C_u = \frac{D_{60}}{D_{10}} = \frac{0.41}{0.09} = 4.56$

d.  $C_c = \frac{D_{60}^3}{(D_{30})^3(D_{10})} = \frac{0.41^3}{(0.185)^3(0.09)} = 0.928$

2.3 a.

U.S. sieve No.	Mass of soil retained on each sieve (g)	Percent retained on each sieve	Percent finer
4	0.0	0.00	<b>100.00</b>
6	30.0	6.00	<b>94.00</b>
10	48.7	9.74	<b>84.26</b>
20	127.3	25.46	<b>58.80</b>
40	96.8	19.36	<b>39.44</b>
60	76.6	15.32	<b>24.12</b>
100	55.2	11.04	<b>13.08</b>
200	43.4	8.68	<b>4.40</b>
Pan	22.0	4.40	<b>0.00</b>
2500			

The grain-size distribution is shown.

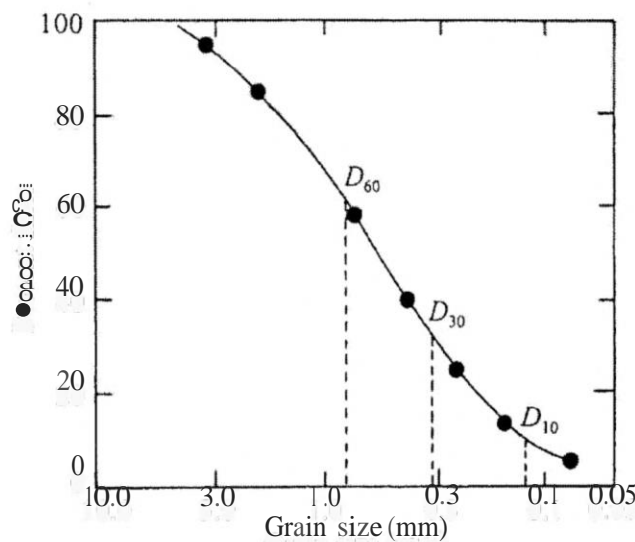

b. From the figure,  $D_{60} = 0.82$  mm,  $D_{30} = 0.31$  mm,  $D_{10} = 0.12$  mm

$$c. C_u = \frac{D_{60}}{D_{10}} = \frac{0.82}{0.12} = 6.83$$


$$d. C_c = \frac{D_{30} - D_{10}}{(D_{60} - D_{10})} = \frac{0.31}{(0.82)(0.12)} = 0.98$$

2.4

a.

U.S. sieve No.	Mass of soil retained on each sieve (g)	Percent retained on each sieve	Percent finer
4	0.0	0.00	100.00
6	0.0	0.00	100.00
10	0.0	0.00	100.00
20	9.1	1.82	98.18
40	249.4	49.88	50.12
60	179.8	35.96	64.04
100	22.7	4.54	95.46
200	15.5	3.10	96.90
Pan	23.5	4.70	100.00

The grain-size distribution is shown in the figure.

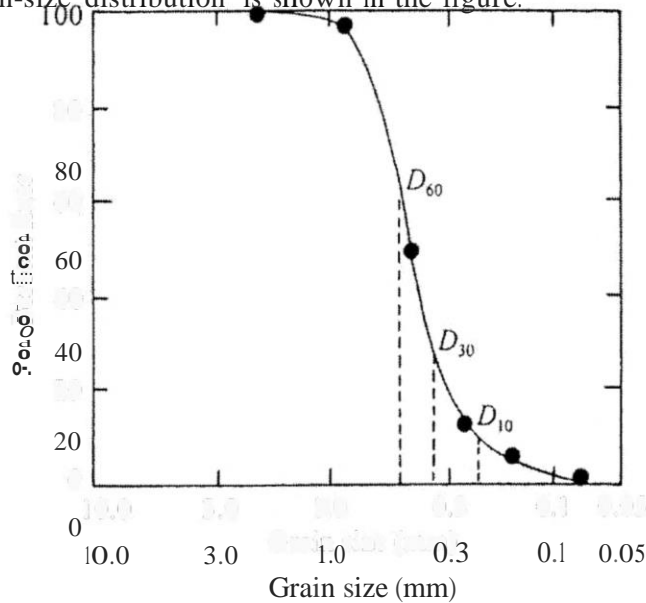


1. From the graph,  $D_{60} = 0.48$  mm,  $D_{30} = 0.33$  mm,  $D_{10} = 0.23$  mm

b. From the graph,  $D_{60} = 0.48$  mm,  $D_{30} = 0.33$  mm,  $D_{10} = 0.23$  mm

c.  $C_{II} = \frac{0.48}{0.23} = 2.09$

d.  $C_c = \frac{0.33}{(0.48)(0.23)} = 0.99$

2.5 The grain-size distribution curve is shown.

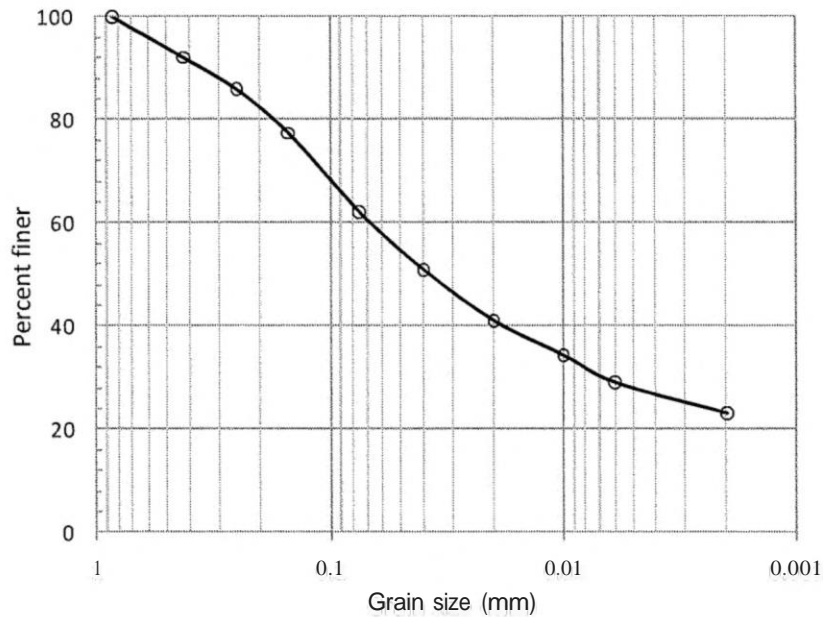

From the figure: Percent finer than 2 mm = 100%  
 Percent finer than 0.06 mm = 58%  
 Percent finer than 0.002 mm = 23%

So, Gravel: 0%  
 Sand: 100 - 58 = 42%  
 Silt: 58 - 23 = 35%  
 Clay: 23 - 0 = 23%

2.6 Refer to the figure in Problem 2.5.

From Table 2.1: Portion larger than 2 mm is gravel  
 (USDA system) Portion between 2 mm and 0.05 mm is sand  
 (ASTM system) Portion between 0.05 mm and 0.002 mm is silt  
 Portion smaller than 0.002 mm is clay

From the figure: Percent finer than 2 mm = 100%  
 Percent finer than 0.06 mm = 54%  
 Percent finer than 0.002 mm = 23%


So, Gravel: **0%**  
 Sand:  $100 - 54 = \mathbf{46\%}$   
 Silt:  $54 - 23 = \mathbf{31\%}$   
 Clay:  $23 - 0 = \mathbf{23\%}$

2.7 Refer to the figure in Problem 2.5.

From the figure: Percent finer than 2 mm = 100%  
 Percent finer than 0.06 mm = 62%  
 Percent finer than 0.002 mm = 23%

So, Gravel: **0%**  
 Sand:  $100 - 62 = \mathbf{38\%}$   
 Silt:  $62 - 23 = \mathbf{39\%}$   
 Clay:  $23 - 0 = \mathbf{23\%}$

2.8 The grain-size distribution is shown.

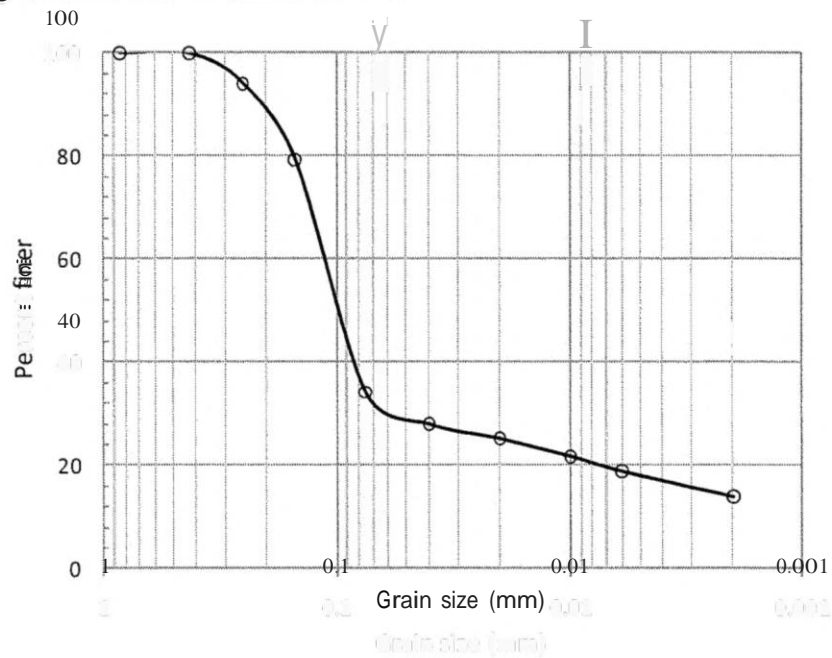

From the figure: Percent finer than 2 mm = 100%  
Percent finer than 0.06 mm = 30%  
Percent finer than 0.002 mm = 14%

So, Gravel: **0%**  
Sand:  $100 - 30 = \mathbf{70\%}$   
Silt:  $40 - 14 = \mathbf{16\%}$   
Clay:  $14 - 0 = \mathbf{14\%}$

2.9 Refer to the figure in Problem 2.8.

From the figure: Percent finer than 2 mm = 100%  
Percent finer than 0.075 mm = 29%  
Percent finer than 0.002 mm = 14%

So, Gravel: **0%**  
Sand:  $100 - 29 = \mathbf{71\%}$   
Silt:  $29 - 14 = \mathbf{15\%}$   
Clay:  $14 - 0 = \mathbf{14\%}$

2.10 Refer to the figure in Problem 2.8.

From the figure: Percent finer than 2 mm = 100%  
Percent finer than 0.075 mm = 34%  
Percent finer than 0.002 mm = 14%

So, Gravel: **0%**  
Sand:  $100 - 34 = \mathbf{66\%}$   
Silt:  $34 - 14 = \mathbf{20\%}$   
Clay:  $14 - 0 = \mathbf{14\%}$

2.11 Soil A:

Percent passing 75 mm sieve = 100 (percent of gravel + sand + fines = 100)

Percent passing 4.75 (No. 4) sieve = 67.5 (percent of sand + fines = 67.5)

Therefore percent of gravel = 32.5

Percent passing 0.075 mm (No. 200) sieve = 8.5

Therefore percent of fines = 8.5 and percent of sand = 59.0

**Soil A contains 32.5% gravel, 59.0 % sand and 8.5% fines.**

Soil B:

Following the same method, Percent of gravel+ sand+ fines= 100

Percent of sand + fines = 100

Percent of fines = 0

Therefore, **Soil B consists of 100% sand.**

2.12 Percent of gravel+ sand +fines= 100

Percent of sand + fines = 63


Percent of fines = 16

Therefore, **percentages of gravel, sand and fines within the soil are 37, 47, and 16, respectively.**

- 2.13
- a. **A has the largest (50%) percentage of gravel.**
  - b. **C is entirely sand, with grains in the size range of 0.2-4.75 mm.**
  - c. **Only D contains clay fractions (less than 0.002 mm) of about 35%.**
  - d. **In Soil A, there are no grains in the size range of 0.2-5.0 mm. It is known as gap graded.**





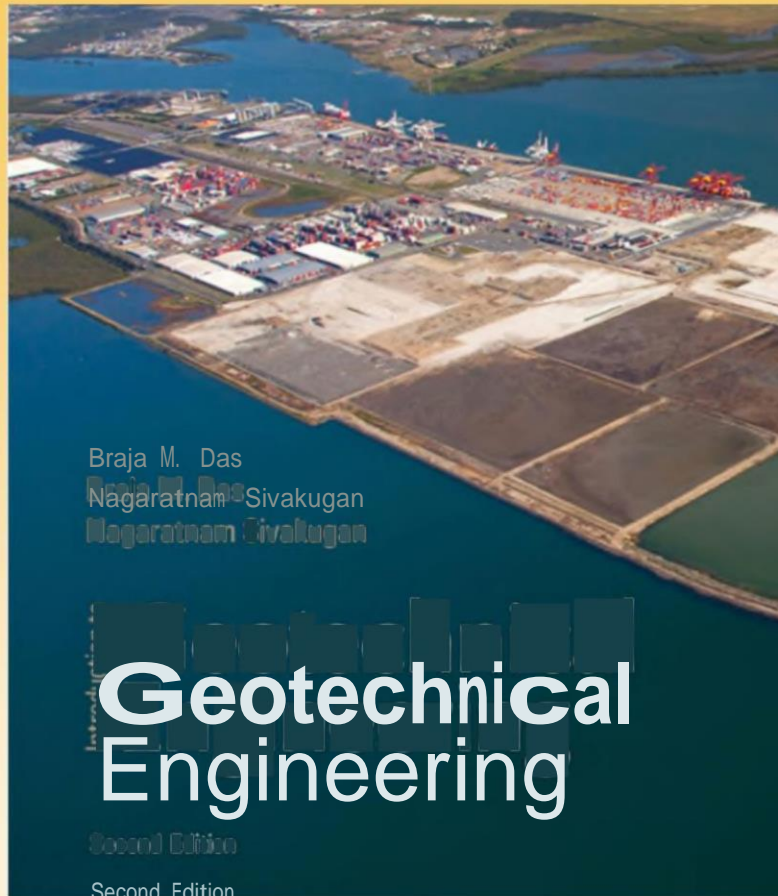

# Chapter 2

## Grain-Size Analysis

# Learning Objectives and Outline

- \* To learn the size ranges for gravels, sands, and fines
- \* To understand how soils are formed
- \* To be able to develop the grain-size distribution curve

## 2.1 Introduction

- \* In engineering, soil is defined as **"an uncemented aggregate of mineral grains and decayed organic matter (solid particles) with liquid and gas in the empty spaces between the solid particles."**
- \* The grain-size distribution in soil influences its physical properties, such as compressibility and shear strength.

## 2.2 Soil-Grain Size


Several organizations have developed *soil-separate-size limits*:

Name of organization	Grain size (mm)			
	Gravel	Sand	Silt	Clay
Massachusetts Institute of Technology (MIT)	>2	2 to 0.06	0.06 to 0.002	<0.002
U.S. Department of Agriculture (USDA)	>2	2 to 0.05	0.05 to 0.002	<0.002
American Association of State Highway and Transportation Officials (AASHTO)	76.2 to 2	2 to 0.075	0.075 to 0.002	<0.002
Unified Soil Classification System (U.S. Army Corps of Engineers, U.S. Bureau of Reclamation)	76.2 to 4.75	4.75 to 0.075	Fines (i.e., silts and clays) <0.075	

## 2.2 Soil-Grain Size Cont'd

- \* American Society of Testing and Materials (ASTM) adopted the Unified Soil Classification System.

Below are the size limits in graphical form:

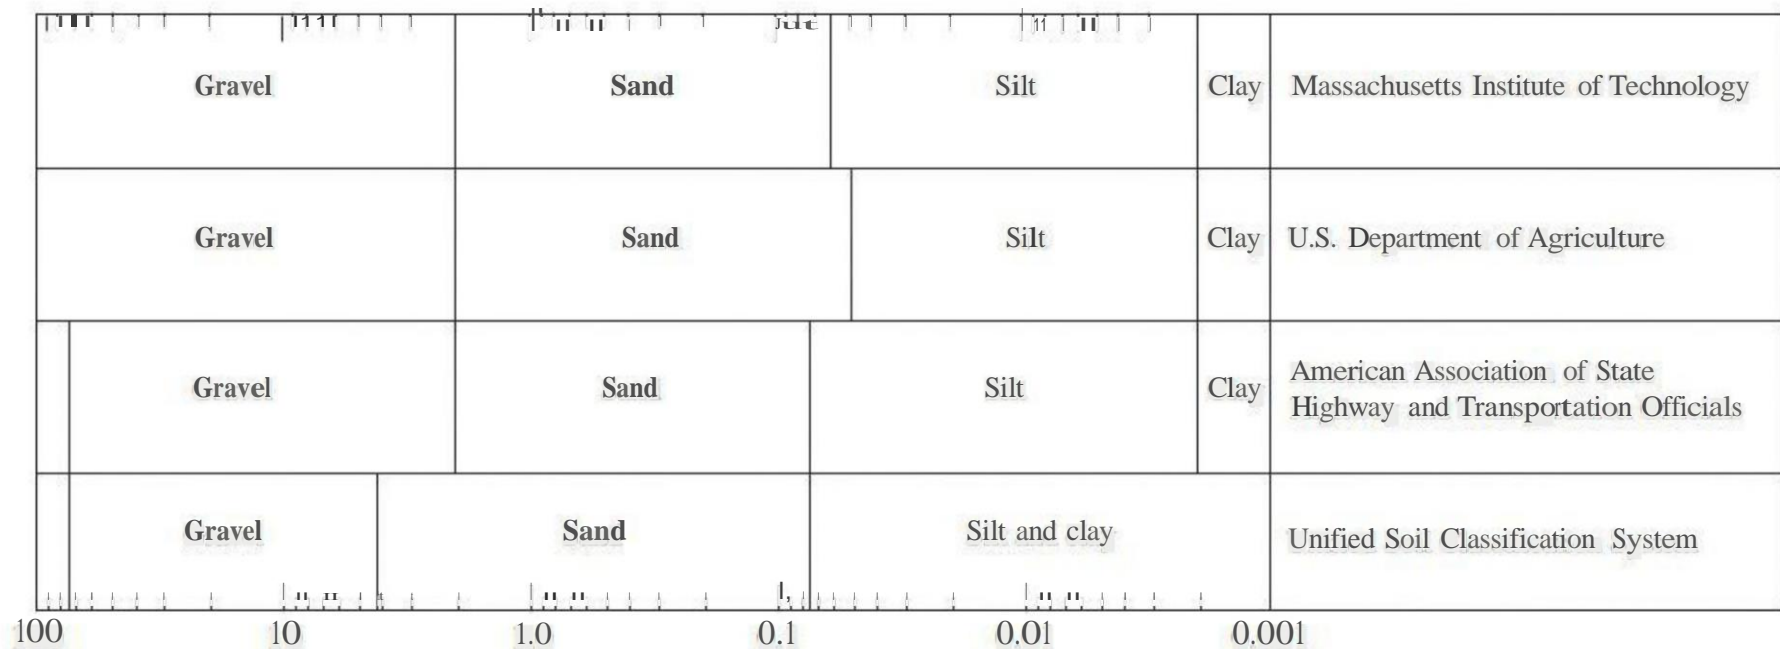

## 2.2 Soil-Grain Size Cont'd

**Gravel:** Pieces of rocks with occasional grains of quartz, feldspar, and other minerals.

**Sand:** Grains that are mostly made of quartz and feldspar. Other minerals may be present at times.

**Silts:** The microscopic soil fractions which consist of very fine quartz grains and some flake-shaped grains that are micaceous mineral fragments.

**Clays:** Mostly flake-shaped microscopic grains of mica, clay minerals, and other minerals. Grains are classified as *clay* based on their size; they do not always contain *clay minerals*.

## 2.2 Soil-Grain Size Cont'd

- \* Three major types of clay minerals:
  - \* Kaolinite
  - \* Illite
  - \* Montmorillonite
- \* Their mineralogy, flakiness, and the large surface areas make the clays plastic and cohesive.
- \* Montmorillonite clays can swell in the presence of water which enters between layers. These expansive clays cause billions of dollars worth of annual damage to roads and buildings.



## 2.3 General Soil Deposits

Most of the soils that cover the earth are formed by the weathering of various rocks. The two general types of weathering are:

- \* **Mechanical Weathering:** Physical forces such as running water, wind, ocean waves, glacier ice and frost action break down rocks into smaller pieces
- \* **Chemical Weathering:** Chemical decomposition of the original rock. In this case, the original materials may be changed to something entirely different



## 2.3 General Soil Deposits Cont'd

- \* When the soil produced by the weathering process is transported by physical agents to other places, these deposits are called *transported soils*.
  - \* **Alluvial:** Deposited by running water
  - \* **Glacial:** Deposited by glacier action
  - \* **Aeolian:** Deposited by wind action
  
- \* The soils that stay in the place of their formation are referred to as *residual soils*.

## 2.3 General Soil Deposits Cont'd

- \* In addition to transported and residual soils, there are *peats* and *organic soils*.
- \* Organic soils have the following characteristics:
  - \* Usually found in low-lying areas with a high ground water table
  - \* Moisture content ranges from 200%-300%
  - \* Highly compressible
  - \* Under loads, a large amount of settlement is derived from secondary consolidation

## 2.4 Some Local Terms for Soils

1. *Caliche*: Mostly found in the desert. Derived from Latin word "calix," meaning lime
2. *Gumbo*: Highly plastic, clayey
3. *Adobe*: Highly plastic, clayey soil found in southwestern U.S.
4. *Terra Rosa*: Residual, red, derived from limestone and dolomite
5. *Muck*: Organic soil with a very high moisture content
6. *Muskeg*: Organic soil deposit
7. *Saprolite*: Derived from mostly insoluble rock, residual
8. *Loam*: Mixture of various grain sizes
9. *Laterite*: Iron oxide and aluminum oxide accumulation, leaching of silica

## 2.5 Grain-Size Analysis

- \* The size of grains may widely vary in a natural soil deposit.
- \* Determining the nature of distribution of the grain size and the degree of plasticity in a given soil is important for design purposes.
- \* Grain-size analysis for grain sizes  $> 0.075$  mm is done by sieve analysis.
- \* **Sieve Analysis:**  
Shaking of the soil sample through a set of sieves that have progressively smaller openings.



## 2.5 Grain-Size Analysis Cont'd

- \* To conduct a sieve analysis, one must first oven-dry the soil and then break all lumps into small grains.
- \* The soil is then shaken through a stack of sieves with openings of decreasing size from top to bottom.
- \* The smallest sized sieve should be the U.S No. 200 sieve.
- \* After the process, the mass of soil retained on each sieve is determined.

## 2.5 Grain-Size Analysis Cont'd

Calculation for a sieve analysis:

- \* Determine the mass of soil retained on each sieve ( $M_1, M_2, \dots, M_n$ ), and in the pan ( $M_p$ )
- \* Determine the total mass of the soil:

$$M_1 + M_2, \dots + M_n + M_p = \mathbf{SM}$$

- \* Determine the cumulative mass of soil retained above each sieve. For the  $i$ th sieve, it is  $M_1 + M_2 + \dots + M_i$ ;
- \* The mass of soil passing the  $i$ th sieve is:


$$SM - (M_1 + M_2 + \dots + M_i)$$

- \* The percent of soil passing the  $i$ th sieve (or percent finer) is:

$$F = \frac{SM - (M_1 + M_2 + \dots + M_i)}{SM} \times 100$$

## 2.5 Grain-Size Analysis Cont'd


- \* Once the percent finer for each sieve has been calculated, values are plotted on semilogarithmic graph paper.
- \* This plot is called the *grain-size distribution curve*:

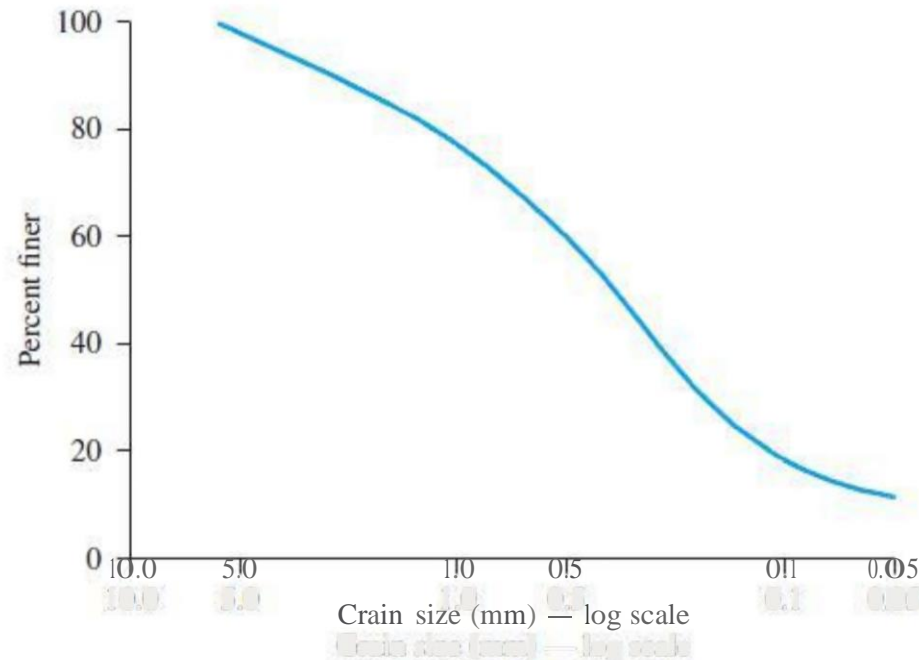

## 2.6 Grain-Size Distribution Curve

The grain-size distribution curve can be used to determine the following four parameters:

1) **Effective Size ( $D_{10}$ ):** Diameter corresponding to 10% finer. It is a good measure to estimate the hydraulic conductivity and drainage through the soil.

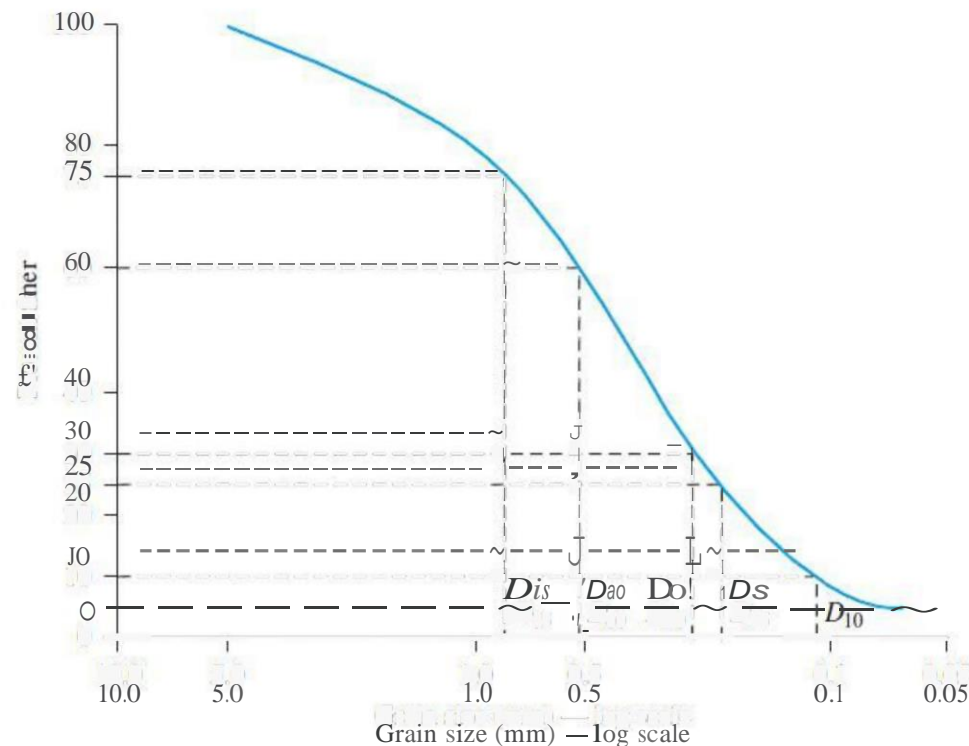



## 2.6 Grain-Size Distribution Curve Cont'd

2) **Uniformity Coefficient (Cu):**

$$C_u = \frac{D_{60}}{D_{10}}$$

3) **Coefficient of Gradation (Cc):**

=

$$C_c = \frac{D_{60}}{D_{10}} \frac{D_{30}}{D_{10}}$$

4) **Sorting Coefficient (So):**

$$S_o = V(D7s/D25)$$

## 2.7 Summary

- \* Gravels, sands, silts, and clays are the four major groups of soil in geotechnical engineering.
- \* There are slight differences in the size ranges used. The Unified Soil Classification System is the most widely utilized system.
- \* Soil is a medium that has the solid grains often mixed with water and air.
- \* In coarse grained soils, grain-size distribution plays an important role in their engineering behavior.
- \* Grain-size analysis is carried out using sieves for coarse-grained soils, and the data is presented graphically (*% finer vs. grain size*).